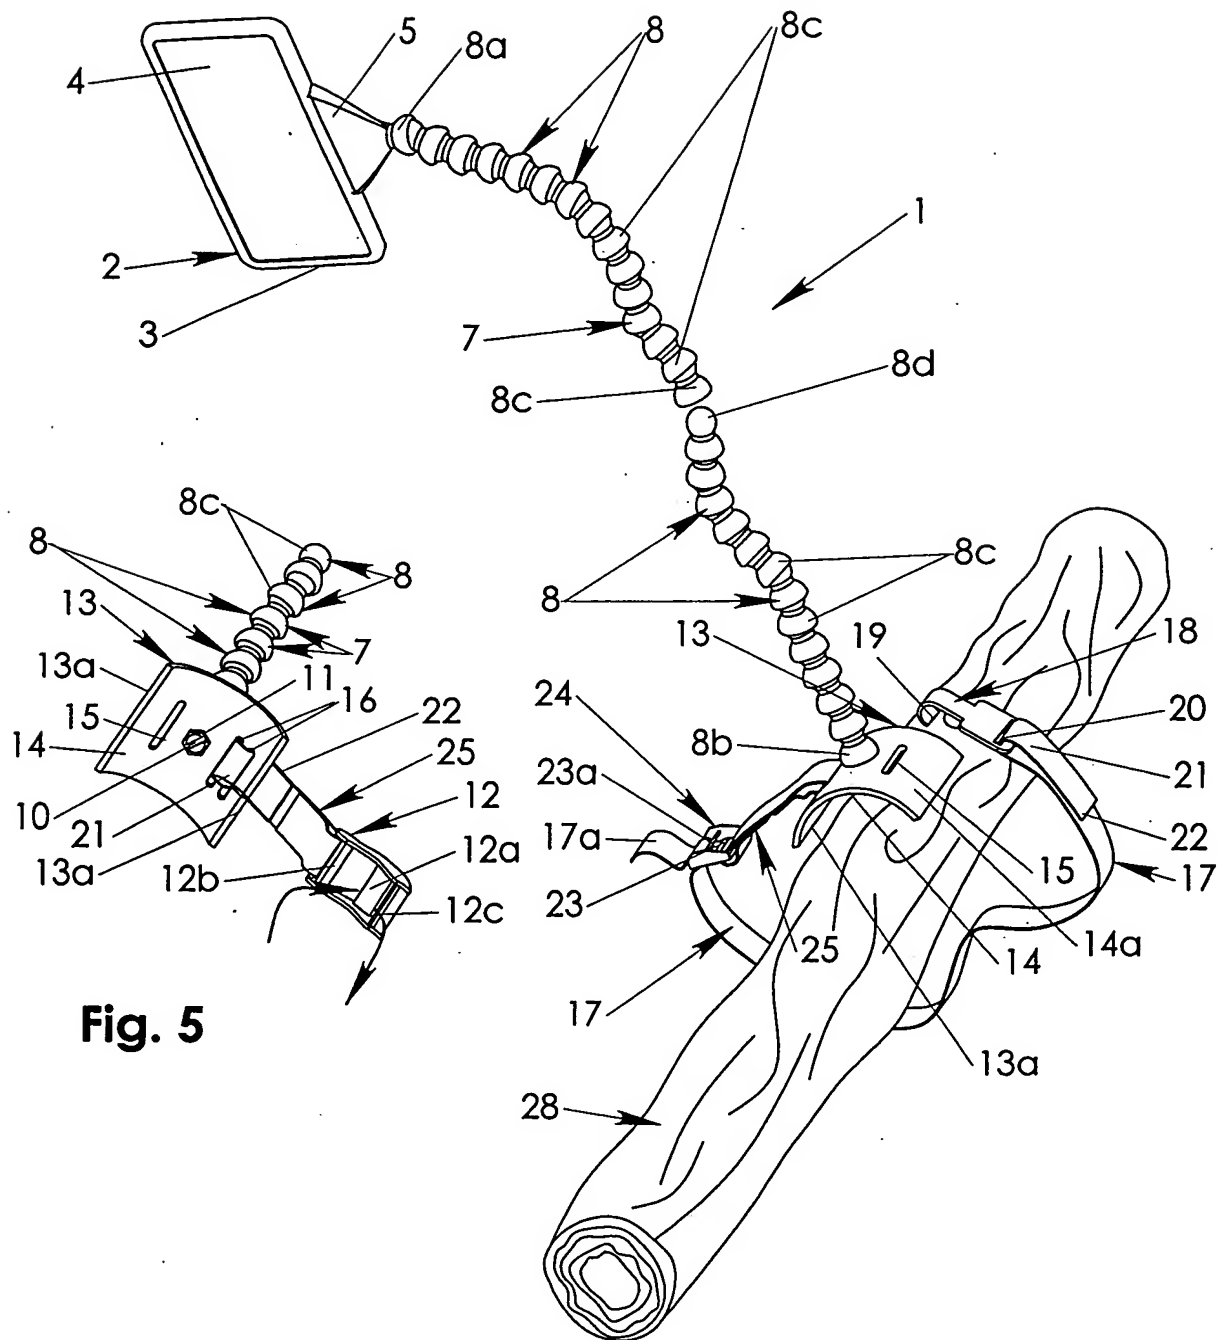


Fig. 2

Fig. 2 is a perspective view of the device 1. It shows a rectangular frame 2 with a top edge 3 and a bottom edge 4. A flexible, corrugated tube 8 is connected to the frame at a junction 5. The tube 8 has a section 8a near the junction, a section 8b at the bottom, and a section 8c in the middle. The tube 8 is supported by a base 13, which has a central opening 14 and side openings 13a. The base 13 is connected to a support structure 16. The tube 8 is also connected to a component 9. The entire assembly is labeled 1.

Fig. 4



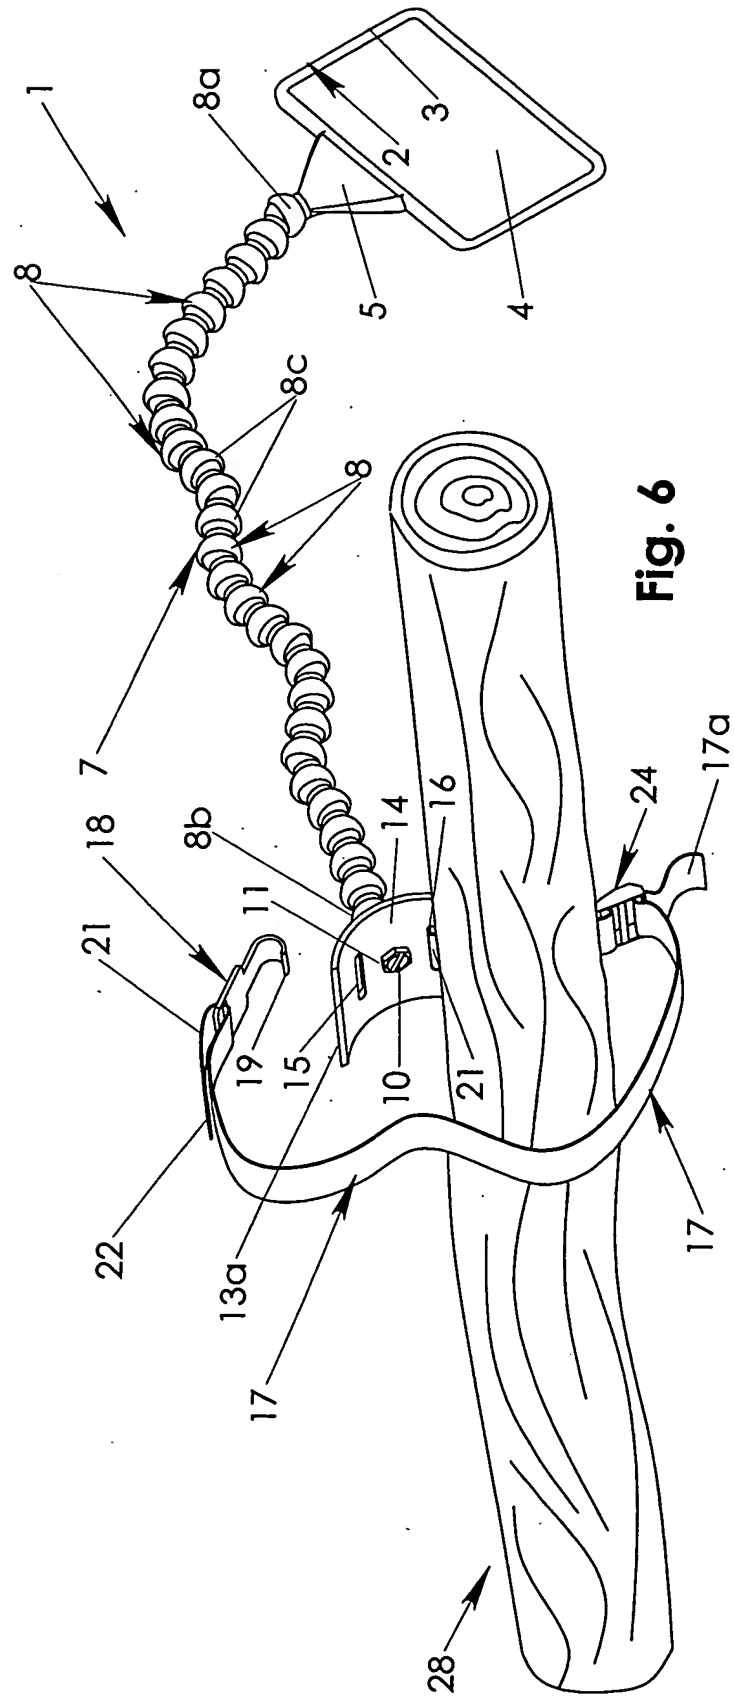


Fig. 6